



General Specifications

Throat Diameter	105*140mm
Impedenza	4 ohm
Minium Impedance	3,8ohm <1,5 KHz
Power RMS	150W > 1.5Khz
Max Power (2)	200W > 2.5Khz
Frequency Range	2,5-20 KHz
Sensibility (1w - 1 mt)	108 dB
Sensibility (2.83v)	111 dB
Voice coil Diameter	44 mm / 1,7"
diaphragm material	Titanium

Technical Parameter


Magnet material	ferrite
Magnet dimension	100*20mm
Gap Height	4 mm
Power advice minium	50wrms
Terminal connection	Solder terminal

Dimension Speaker / Package

Outer diameter	120*160 mm
Installation hole diameter	4* 150*120mm
Mounting depth	87 mm
Magnet diameter	100 mm
Volume speaker	0,35 Lt
Speaker Weight	2,05 kg
Package Weight	2,25 kg
Shipping box	17*11*10 cm

Parameter Thiele Small

Re (ohm)	3,5
Fs (hz)	2500
Le (mH)	0,065
Qts	2,09
Qms	4,25
Qes	4,1
Voice coil winding height (mm)	4,5
Voice Coil Wire	CCAW
Voice coil material	KSV

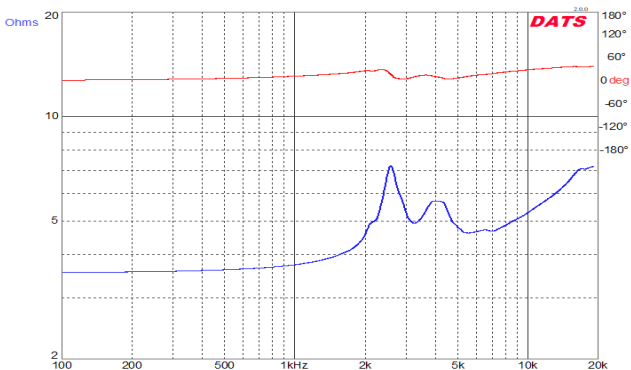

Crossover HPF passive advice

Crossover advice Hpf	2500 hz-18db	
C1= 6,1 uF	C2= 18,2 uF	L1= 0,33mH

Drawing dimension / installation

