


GS TW 45

General Specifications

Throat Diameter	100*100mm
Impedenza	4 ohm
Minium Impedance	3,8ohm <1,5 KHz
Power RMS	170W > 2.5Khz
Max Power (2)	250W > 2.5Khz
Frequency Range	2-20 KHz
Sensibility (1w - 1 mt)	106 dB
Sensibility (2.83v)	109 dB
Voice coil Diameter	45 mm / 1,75"
diaphragm material	Titanium

Parameter Thiele Small

Re (ohm)	3,8
Fs (hz)	2200
Le (mH)	0,073
Qts	2,63
Qms	5,58
Qes	4,98
Voice coil winding height (mm)	4
Voice Coil Wire	CCAW
Voice coil material	KSV

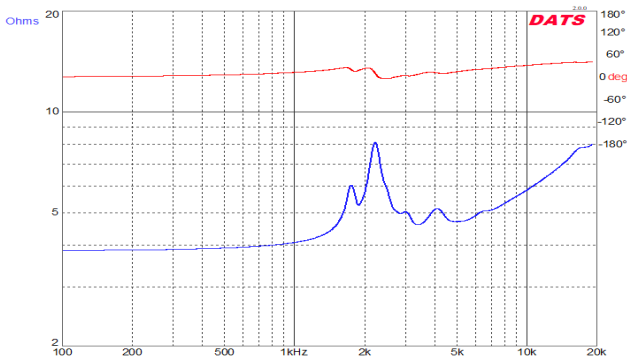

Technical Parameter

Magnet material	ferrite
Magnet dimension	90*20mm
Gap Height	3,5 mm
Power advice minium	40wrms
Terminal connection	Solder terminal


Dimension Speaker / Package

Outer diameter	100*100 mm
Installation hole diameter	4* 90mm
Mounting depth	65 mm
Magnet diameter	90 mm
Volume speaker	0,25 Lt
Speaker Weight	1,45 kg
Pakage Weight	1,65 kg
Shipping box	11*11*8 cm




Crossover HPF passive advice

Crossover advice Hpf		2500 hz-18db
C1= 5,3 uF	C2= 15,9 uF	L1= 0,38mH

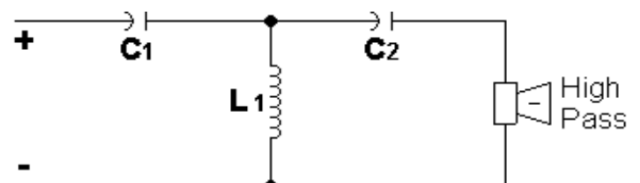

Drawing dimension / installation

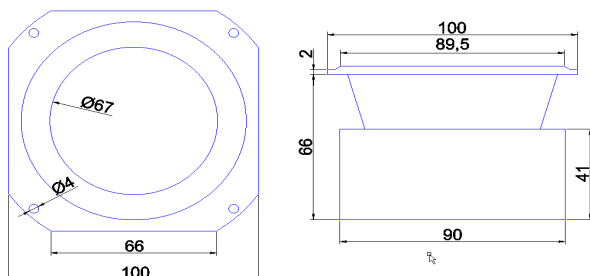

Gs Audio Srl

Via matteotti 220/A - San Possidonio MO - Italy

Whatsapp + 393473263458 - Mail: info@gsaudio.it