




General Specifications


Throat Diameter	25 mm
Impedance	4 Ohm
Minimum Impedance	3.8 Ohm
Power RMS	50 WRMS
Max Power (2)	100 WMAX
Frequency Range	900 Hz ÷ 18 kHz
Sensibility (1W - 1mt)	94 dB
Sensibility (2.83V)	97.2 dB
Voice coil Diameter	25 mm
Diaphragm material	silk

Thiele&Small Parameter

Re (Ohm)	3.82
Fs (Hz)	962.27
Le (mH)	0.059
Qts	2.72
Qms	5.10
Qes	5.82
Xmax (mm - one way)	-
Mms (g)	-

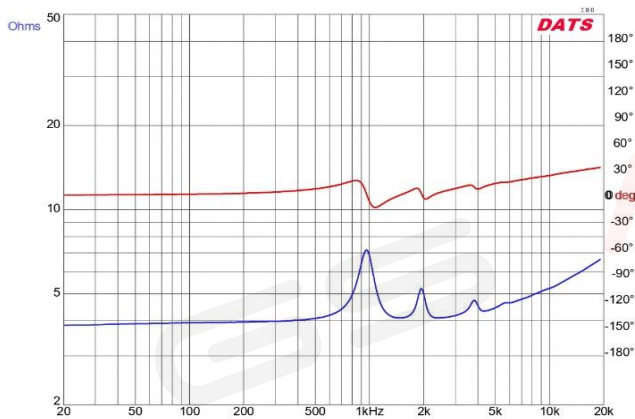

Drawing dimension / installation

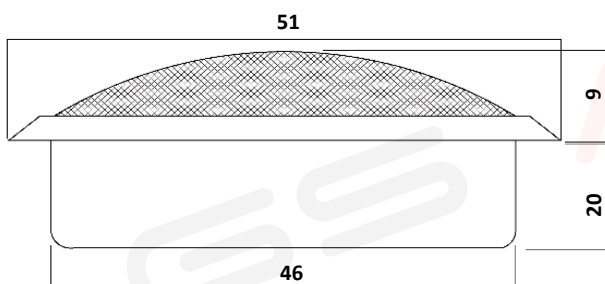

Technical Parameter


Magnet material	neodymium
Magnet dimension	24 mm
Gap height	3 mm
Power advice minimum	10 WRMS
Terminal connection	faston
Voice coil	CCAW

Dimension Speaker / Package

Outer diameter	51 mm
Installation diameter	46 mm
Mounting depth	20 mm
Basket material	plastic
Volume speaker	0.01 l
Speaker weight	0.10 kg
Package weight	0.3 kg
Shipping box	18.2x15.5x4.5 cm

Package components

Mix of orientable components, screws, crossover set

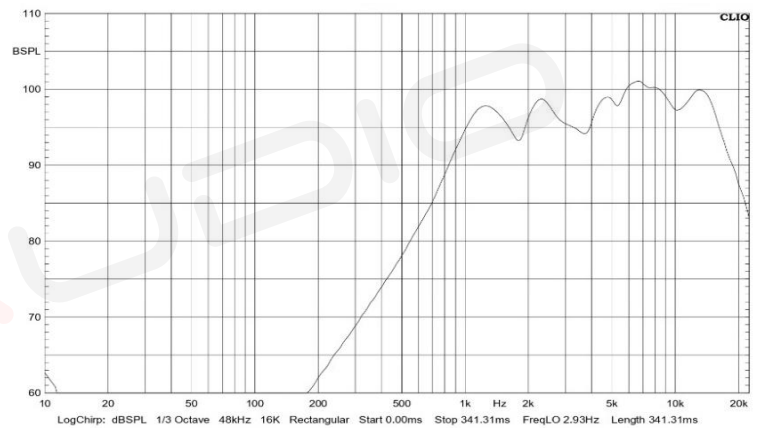


For a clearer sound it is recommended:

Crossover HPF passive advice

2500 Hz - 12dB

C1= 10.7 uF

L1= 0.38 mH

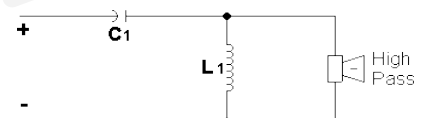

Gs Audio Srl - www.gsaudio.it

Via Matteotti 220/A - San Possidonio MO - Italy

Whatsapp +39 3473263458 - e-mail: info@gsaudio.it