




## GS TW SETA 28

### General Specifications

Throat Diameter	28 mm
Impedance	4 Ohm
Minimum Impedance	4.05 Ohm
Power RMS	70 WRMS
Max Power (2)	140 WRMS
Frequency Range	1kHz ÷ 20 kHz
Sensibility (1w - 1mt)	95 dB
Sensibility (2.83V)	98 dB
Voice coil Diameter	28 mm
Diaphragm material	silk

### Thiele&Small Parameter

Re (Ohm)	4.05
Fs (Hz)	1831.70
Le (mH)	0.040
Qts	1.581
Qms	3.184
Qes	3.138
Xmax (mm - one way)	-
Mms (g)	-

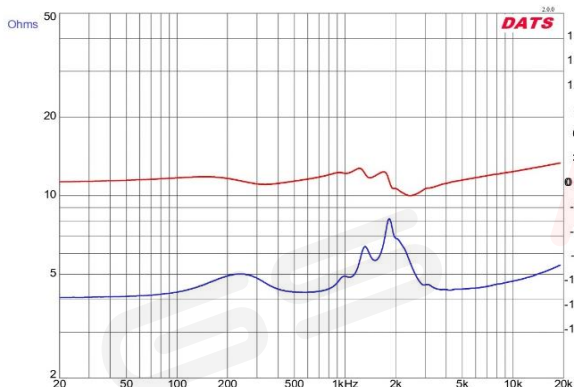

### Technical Parameter


Magnet material	neodymium
Magnet dimension	27 mm
Gap height	3 mm
Power advice minimum	25 WRMS
Terminal connection	faston
Voice coil	CCAW

### Dimension Speaker / Package


Outer diameter	59 mm
Installation diameter	49 mm
Mounting depth	17 mm
Basket material	aluminium
Volume speaker	0.02 l
Speaker weight	0.10 kg
Package weight	0.31 kg
Shipping box	17.2x7.5x5.5 cm

### Package components

Crossover set and screws included

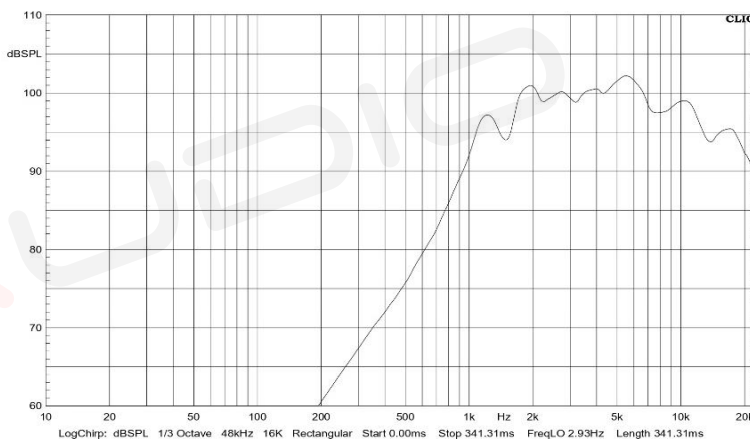

### Drawing dimension / installation

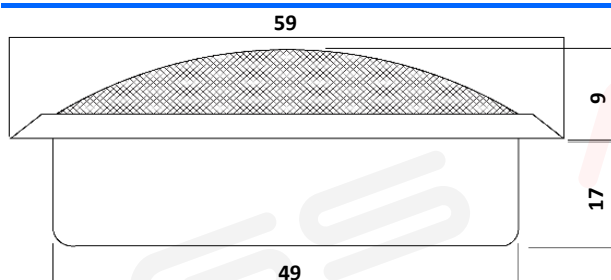


For a clearer sound it is recommended:

### Crossover HPF passive advice

2500 Hz - 12dB

C1= 7.1 uF

L1= 0.29 mH

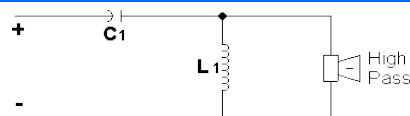

Gs Audio Srl - [www.gsaudio.it](http://www.gsaudio.it)

Via Matteotti 220/A - San Possidonio MO - Italy

Whatsapp +39 3473263458 - e-mail: [info@gsaudio.it](mailto:info@gsaudio.it)