




**General Specifications**


Throat Diameter	41 mm
Impedance	4 Ohm
Minimum Impedance	3.4 Ohm
RMS Power	100 WRMS > 3 kHz
Max Power	200 WRMS > 3 kHz
Frequency Range	3 kHz - 15 kHz
Sensitivity (1W - 1m)	105 dB
Sensitivity (2.83V)	108.5 dB
Voice Coil Diameter	26 mm
Voice Coil Wire	CCAW
Voice Coil Winding Height	3.1 mm
Voice Coil Material	Kapton
Diaphragm Material	Titanium

**Thiele&Small Parameter**

Re (Ohm)	3.44
Fs (Hz)	2781.10
Le (mH) at 10 kHz	0.043
Qts	1.46
Qms	2.47
Qes	3.54

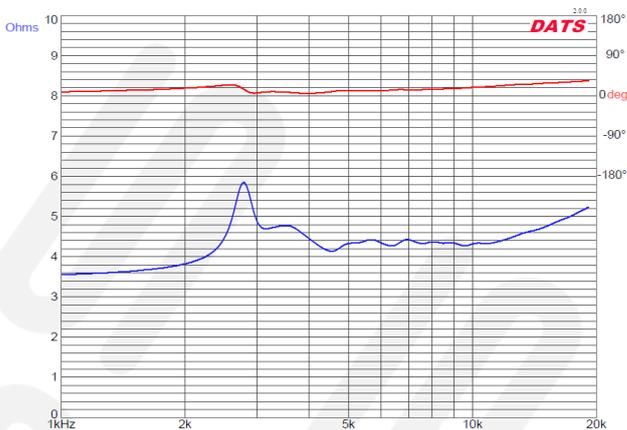

**Drawing Dimension / Installation**

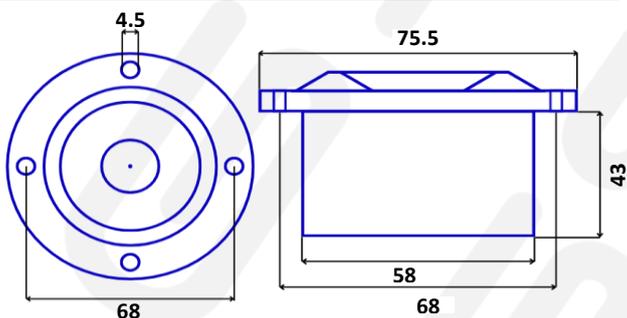


**Technical Parameter**

Magnet Material	Neodymium
Magnet Dimensions	25x8 mm
Gap Height	2.5 mm
Recommended Minimum Power	10 WRMS
Terminal Connection	Push Terminals

**Speaker / Package Dimensions**

Outer Diameter	75.5 mm
Mounting Hole Diameter	68 mm
Mounting Depth	43 mm
Magnet Diameter	58 mm
Speaker Volume	0.14 L
Speaker Weight	0.3 kg
Package Weight (2 Tweeters)	0.6 kg
Shipping Box Dimensions	180 x 90 x 57 mm

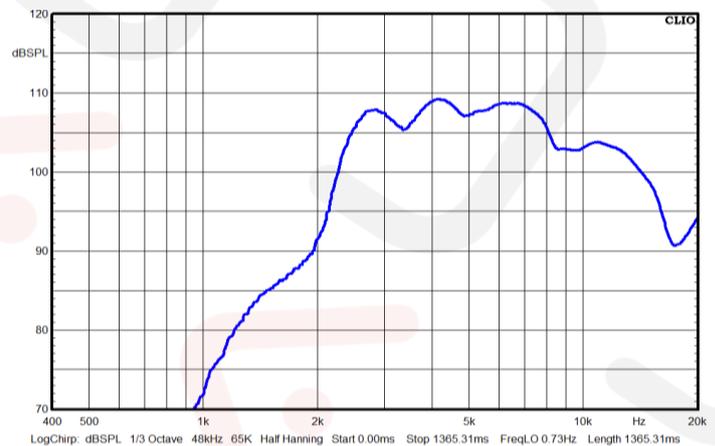


Graph measured at 2V - 1m / 4Ω

For a clearer sound it is recommended:

**Recommended Crossover (HPF)**

**3500 Hz - 18 dB**

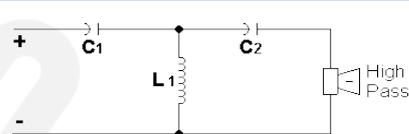

C1= 7.6 uF

C2= 22.75 uF

L1= 0.13 mH