




General Specifications


Nominal Diameter	115 mm
Impedance	8 Ohm
Minimum Impedance	5.9 Ohm
Power RMS	220 WRMS
Max Power (2)	400 WMAX
Frequency Range	1.6 kHz ÷ 9 kHz
Sensibility (1W - 1mt)	105 dB
Sensibility (2.83V)	106.5 dB
Voice coil Diameter	46 mm
Voice coil Wire	CCAW
Voice coil winding height	3 mm
Voice coil material	kapton

Thiele&Small Parameter

Re (Ohm)	5.85
Fs (Hz)	1580.00
Le (mH)	0.079
Qts	1.77
Qms	5.75
Qes	2.57

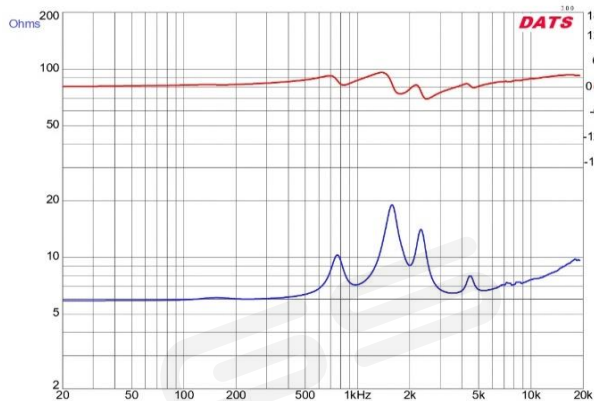

Drawing dimension / installation

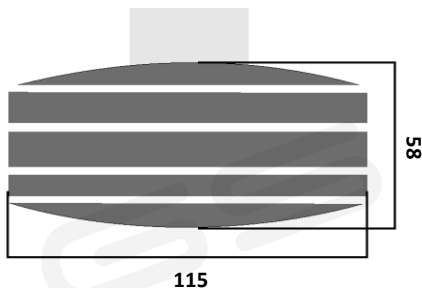

Technical Parameter

Magnet material	ferrite
Magnet dimension	115x15 mm
Gap height	2 mm
Power advice minimum	50 WRMS
Terminal connection	push terminal
Demulation ring	yes, copper


Dimension Speaker / Package

Outer diameter	115 mm
Mounting depth	58 mm
Volume speaker	0.7 l
Speaker weight	0.9 kg
Package weight	1.2 kg
Shipping box driver	13.5x13.5x10 cm

For a clearer sound it is recommended:

Crossover HPF advice


3000 Hz - 18 dB

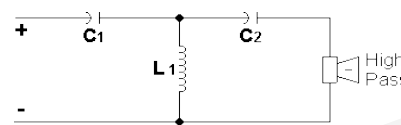

C1= 5,4 uF

C2= 16.3 uF

L1= 0.25 mH

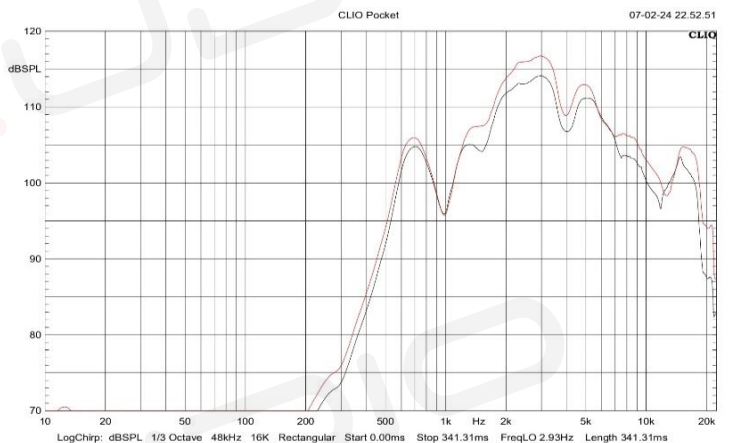

Legend: — + 129mm HORN — + 126mm HORN