




## General Specifications


Nominal Diameter	135 mm
Impedance	8 Ohm
Minimum Impedance	5.8 Ohm
Power RMS	250 WRMS
Max Power (2)	500 WMAX
Frequency Range	1.3 kHz ÷ 10 kHz
Sensibility (1W - 1mt)	103 dB
Sensibility (2.83V)	104.5 dB
Voice coil Diameter	50 mm
Voice coil Wire	CCAW
Voice coil winding height	3 mm
Voice coil material	kapton

## Thiele&Small Parameter

Re (Ohm)	5.78
Fs (Hz)	2172.80
Le (mH)	0.085
Qts	2.66
Qms	9.29
Qes	3.72

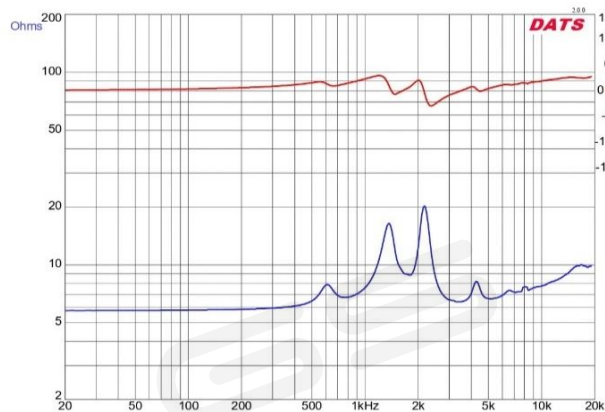

## Drawing dimension / installation

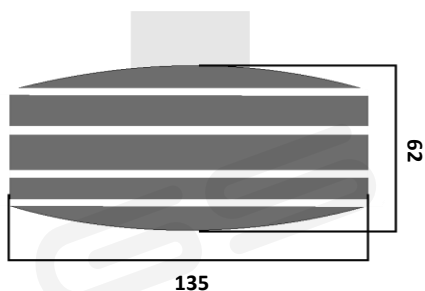

## Technical Parameter

Magnet material	ferrite
Magnet dimension	135x15 mm
Gap height	2 mm
Power advice minimum	125 WRMS
Terminal connection	push terminal
Demulation ring	yes, copper


## Dimension Speaker / Package

Outer diameter	135 mm
Mounting depth	62 mm
Volume speaker	0.9 l
Speaker weight	2.2 kg
Package weight	2.5 kg
Shipping box driver	15.5x15.5x9.5 cm

*For a clearer sound it is recommended:*

### Crossover HPF advice

**3000 Hz - 18 dB**

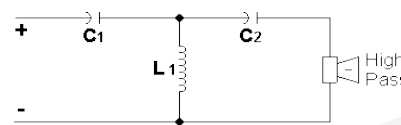

C1= 5,4 uF

C2= 16,3 uF

L1= 0.26 mH

