




General Specifications


Nominal Diameter	175 mm
Impedance	8 Ohm
Minimum Impedance	5.5 Ohm
Power RMS	300 WRMS
Max Power (2)	600 WMAX
Frequency Range	600 Hz ÷ 14 kHz
Sensibility (1W - 1mt)	105 dB
Sensibility (2.83V)	106.5 dB
Voice coil Diameter	75 mm
Voice coil Wire	CCAW
Voice coil winding height	3 mm
Voice coil material	kapton

Thiele&Small Parameter

Re (Ohm)	5.54
Fs (Hz)	509.39
Le (mH)	0.147
Qts	0.732
Qms	3.56
Qes	0.92

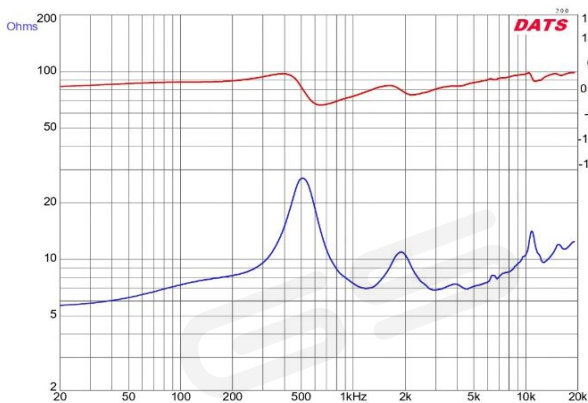

Drawing dimension / installation

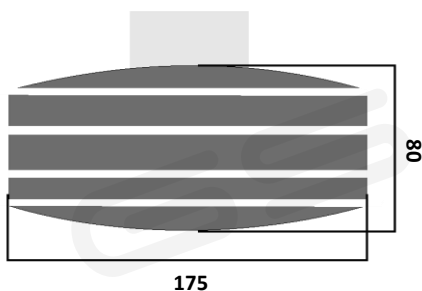

Technical Parameter

Magnet material	ferrite
Magnet dimension	175x20 mm
Gap height	2 mm
Power advice minimum	70 WRMS
Terminal connection	push terminal
Demulation ring	yes, copper

Dimension Speaker / Package

Outer diameter	175 mm
Mounting depth	80 mm
Volume speaker	1.6 l
Speaker weight	4.8 kg
Package weight	5.2 kg
Shipping box driver	22.5x22.5x13 cm

For a clearer sound it is recommended:

Crossover HPF advice 1300 Hz - 18 dB

