



### General Specifications

Nominal Diameter	250 mm
Nominal Impedance	8 ohm
Minium Impedance	6,42 Ohm
Power RMS	650
Max Power	1300
Frequency Range	70 ÷ 4500 Hz
Efficiency (Eta 0)	1,80%
Sensibility (1w - 1 mt)	94,65
Sensibility (2.83v)	101.3 dB
Voice coil Diameter	76 mm
Voice Coil Wire	CCAW

### Parameter Thiele Small



Re (ohm)	6,42
Fs (hz)	74,02
Le (mH)	0,467
Vas (L)	21,6
Cms (mm/N)	0,12
BxL (T*m)	16,11
Qts	0,442
Qms	9,4
Qes	0,464
Xmax (mm - one way)	5,0
Mms (g)	40,4

### Technical Parameter


Voice coil winding height	16 mm
Voice coil forner	composite fiber
Magnet material	ferrite
Magnet dimension	180*80*20mm
Gap Height	8 mm
Demulation ring	no
Crossover advice Hpf	70 hz-18db
Crossover advice Lpf	3500 hz-12db
Power advice minium	150wrms
Terminal connection	Push terminal
Surround Material	Cloth
Surround type	Dual wave
Cone material	Pressed paper

### Dimension Speaker / Package

Outer diameter	260mm
Installation diameter	235mm
Mounting depth	98 mm
Magnet diameter	180 mm
Type basket	Alluminium
Volume speaker	2.6 L
Speaker Weight	6,1 kg
Pakage Weight	6,6 kg
Shipping box	28*28*13 cm

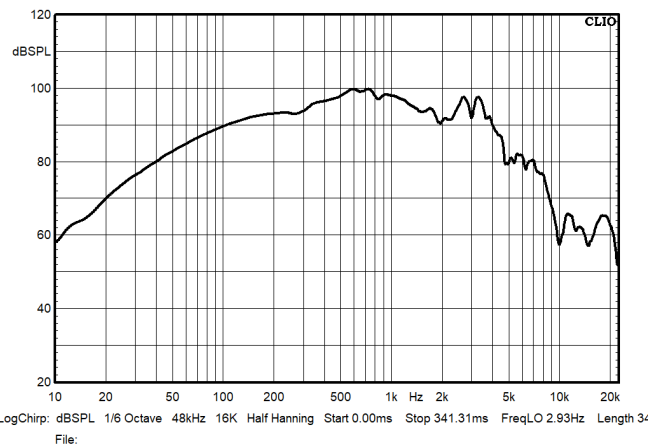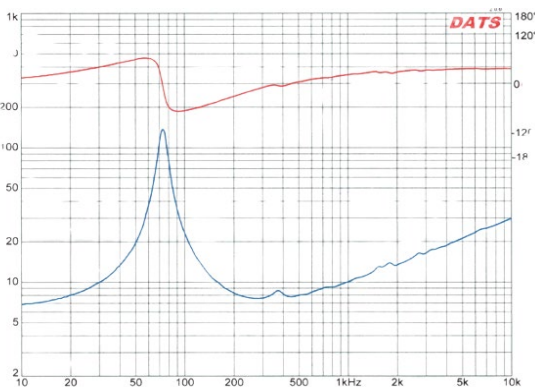

### Drawing dimension / installation

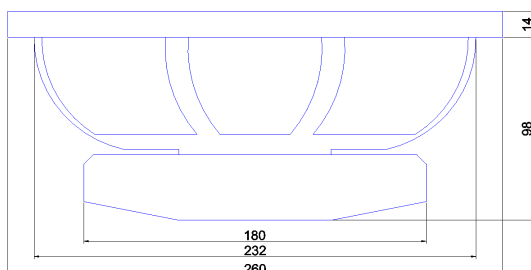

**Gs Audio Srl**

Via matteotti 220/A - San Possidonio MO - Italy  
Whatsapp + 393473263458 - Mail: info@gsaudio.it