




GS VOCE 12N768

General Specifications


Nominal Diameter	300 mm
Nominal Impedance	8 ohm
Minium Impedance	
Power RMS	600 Wrms
Max Power	1200W
Frequency Range	55-4000Hz
Efficiency (Eta 0)	1,80%
Sensibility (1w - 1 mt)	94,65dB%
Sensibility (2.83v)	96,61dB
Voice coil Diameter	76 mm
Voice Coil Wire	CCAW

Parameter Thiele Small

Re (ohm)	6,42
Fs (hz)	74,02
Le (mH)	0,467
Vas (L)	21,6
Cms (mm/N)	0,12
BxL (T*m)	16,11
Qts	0,442
Qms	9,4
Qes	0,464
Xmax (mm - one way)	4,5
Mms (g)	40,4

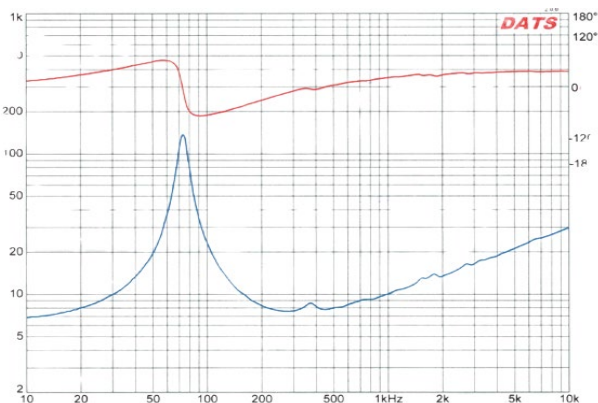

Drawing dimension / installation

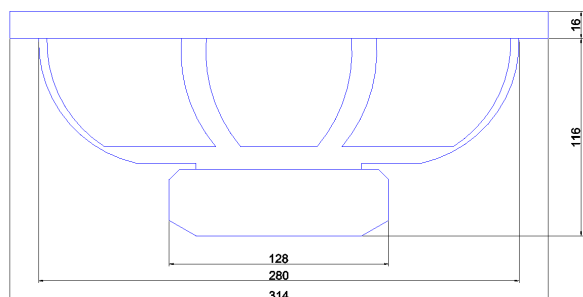


Technical Parameter

Voice coil winding height	16 mm
Voice coil forner	composite fiber
Magnet material	neodimium
Magnet dimension	70*15*25mm
Gap Height	10 mm
Demulation ring	no
Crossover advice Hpf	60 hz-18db
Crossover advice Lpf	3500 hz-12db
Power advice minium	150wrms
Terminal connection	Push terminal
Surround Material	Cloth
Surround type	Dual wave
Cone material	Pressed paper

Dimension Speaker / Package

Outer diameter	320mm
Installation diameter	280mm
Mounting depth	116 mm
Magnet diameter	128 mm
Type basket	Alluminium
Volume speaker	3.3 L
Speaker Weight	4 kg
Pakage Weight	4,4 kg
Shipping box	34*34*15 cm

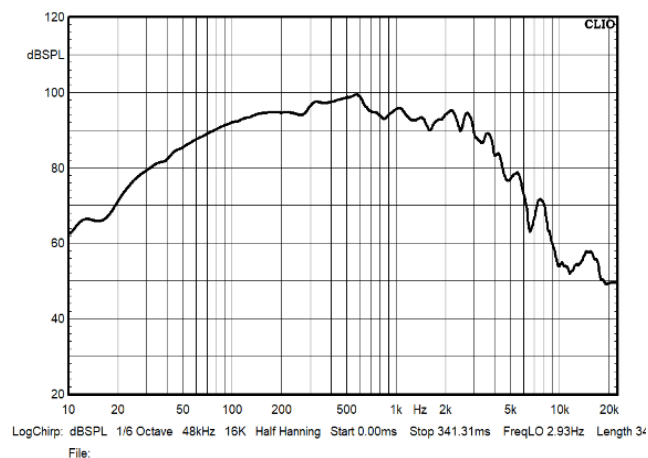

Gs Audio Srl - www.gsaudio.it

Via matteotti 220/A - San Possidonio MO - Italy

Whatsapp + 393473263458 - Mail: info@gsaudio.it