



### General Specifications

Nominal Diameter	200 mm
Nominal Impedance	4 ohm
Minium Impedance	3,3 ohm
Power RMS	400
Max Power	800
Frequency Range	85 ÷ 7000 Hz
Efficiency (Eta 0)	1,33%
Sensibility (1w - 1 mt)	95,3dB
Sensibility (2.83v)	100,2 dB
Voice coil Diameter	52 mm
Voice Coil Wire	CCAW

### Parameter Thiele Small


Re (ohm)	3,32
Fs (hz)	100,9
Le (mH)	0,104
Vas (L)	7,77
Cms (mm/N)	0,12
BxL (T*m)	8,79
Qts	0,54
Qms	9,09
Qes	0,57
Xmax (mm - one way)	3,8
Mms (g)	21,1

### Technical Parameter

Voice coil winding height	11 mm
Voice coil forner	composite fiber
Magnet material	ferrite
Magnet dimension	135*55*17mm
Gap Height	6 mm
Demulation ring	yes
Crossover advice Hpf	90 hz-18db
Crossover advice Lpf	6500 hz-12db
Power advice minium	80wrms
Terminal connection	Push terminal
Surround Material	Cloth
Surround type	Dual wave
Cone material	Pressed paper

### Dimension Speaker / Package

Outer diameter	210mm
Installation diameter	183mm
Mounting depth	85 mm
Magnet diameter	135 mm
Type basket	Alluminium
Volume speaker	1,3 L
Speaker Weight	2,5 kg
Pakage Weight	3,1 kg
Shipping box	24*24*11 cm

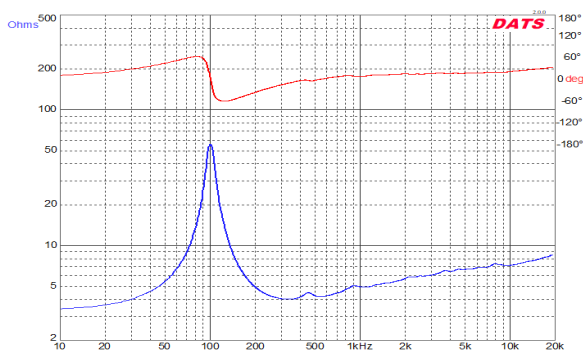

### Drawing dimension / installation

