




### General Specifications

Nominal Diameter	200 mm
Nominal Impedance	8 ohm
Minium Impedance	5,5 ohm
Power RMS	400
Max Power	800
Frequency Range	85 ÷ 7000 Hz
Efficiency (Eta 0)	1,35%
Sensibility (1w - 1 mt)	93,4dB
Sensibility (2.83v)	95,1 dB
Voice coil Diameter	52 mm
Voice Coil Wire	CCAW

### Parameter Thiele Small

Re (ohm)	5,55
Fs (hz)	107,6
Le (mH)	0,146
Vas (L)	9,09
Cms (mm/N)	0,14
BxL (T*m)	8,5
Qts	0,74
Qms	9,8
Qes	0,8
Xmax (mm - one way)	3,8
Mms (g)	15,4

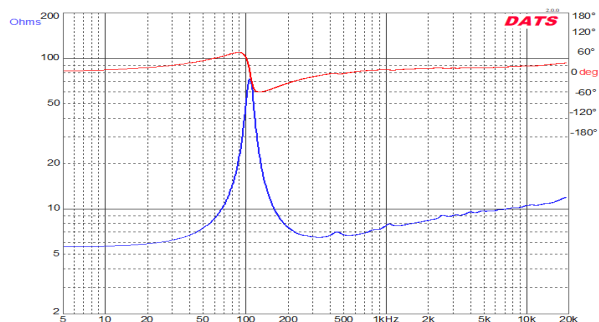


### Technical Parameter

Voice coil winding height	11 mm
Voice coil forner	composite fiber
Magnet material	ferrite
Magnet dimension	135*55*17mm
Gap Height	6 mm
Demulation ring	yes
Crossover advice Hpf	90 hz-18db
Crossover advice Lpf	6000 hz-12db
Power advice minium	80wrms
Terminal connection	Push terminal
Surround Material	Cloth
Surround type	Dual wave
Cone material	Pressed paper

### Dimension Speaker / Package

Outer diameter	210mm
Installation diameter	183mm
Mounting depth	85 mm
Magnet diameter	135 mm
Type basket	Alluminium
Volume speaker	1,3 L
Speaker Weight	2,5 kg
Pakage Weight	3,1 kg
Shipping box	24*24*11 cm

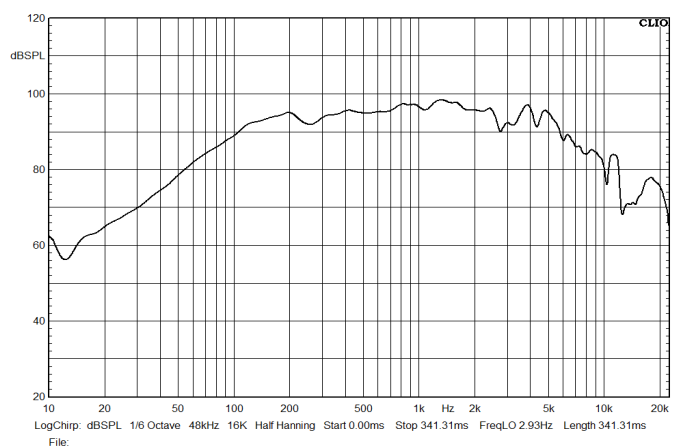

### Drawing dimension / installation

